

## BOLT KITS

### MBK SERIES




#### FEATURE:

Bolt kits are designed for stacking modular valve systems. their lengths can be optionally selected according to stacking layers.

- © REMARKS: 1.MOLT LENGTHS INCLUDE LENGTHS FOR UPPER SOLENOID DIRECTIONAL CONTROL VALVES.  
 2.THESE SIZES ARE MADE FOR AND APPLIED TO KOMPASS, IN CASE OF STACKING APPLICATIONS WITH OTHER BRAND'S PRODUCTS, PLEASE CHECK DIMENSIONS OF MODULAR VALVES IN THIS CATALOGUE AT FIRST AND CONTACT US.

#### Dimensions

### MBK-02、03、04、06

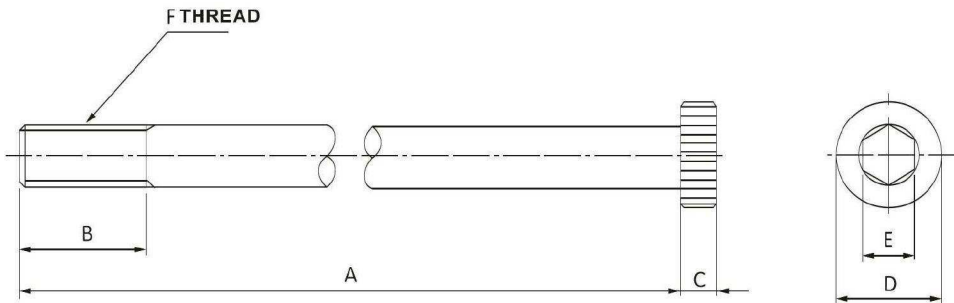

#### BOLT DESCRIPTIONS:

| MODEL     | BOLT LENGTH<br>A | BOLT SIZE<br>& Q'TY | MODEL     | BOLT LENGTH<br>A | BOLT SIZE<br>& Q'TY | MODEL        | B        | C         | D  |
|-----------|------------------|---------------------|-----------|------------------|---------------------|--------------|----------|-----------|----|
| MBK-02-01 | 85               | M5XP0.8X4 PCS       | MBK-04-01 | 105              | M10XP1.25X4 PCS     | MBK-02       | 22       | 5         | 8  |
| MBK-02-02 | 125              |                     | MBK-04-02 | 170              |                     | MBK-03       | 29       | 6         | 10 |
| MBK-02-03 | 165              |                     | MBK-04-03 | 230              |                     | MBK-06       | 36       | 12        | 18 |
| MBK-02-04 | 205              |                     | MBK-04-04 | 290              |                     |              |          |           |    |
| MBK-03-01 | 90               | M6XP1.0X4 PCS       | MBK-06-01 | 140              | M12XP1.75X6 PCS     | <b>MODEL</b> | <b>E</b> | <b>F</b>  |    |
| MBK-03-02 | 145              |                     | MBK-06-02 | 230              |                     | MBK-02       | 4        | M5XP0.8   |    |
| MBK-03-03 | 200              |                     | MBK-06-03 | 310              |                     | MBK-03       |          | M6XP1.0   |    |
| MBK-03-04 | 255              |                     | MBK-06-04 | 395              |                     | MBK-06       |          | M12XP1.75 |    |